

NOVAIR-MTA,S.A.



DEPOSITOS AIRE COMPRIMIDO
DIRECTIVA 97/23/CE

H.t. n°: 85.001

Fecha: 08/03/06

Rev.: 5

Hoja: 1/1

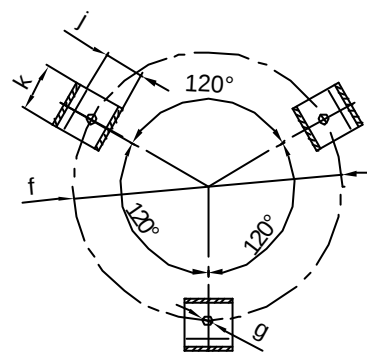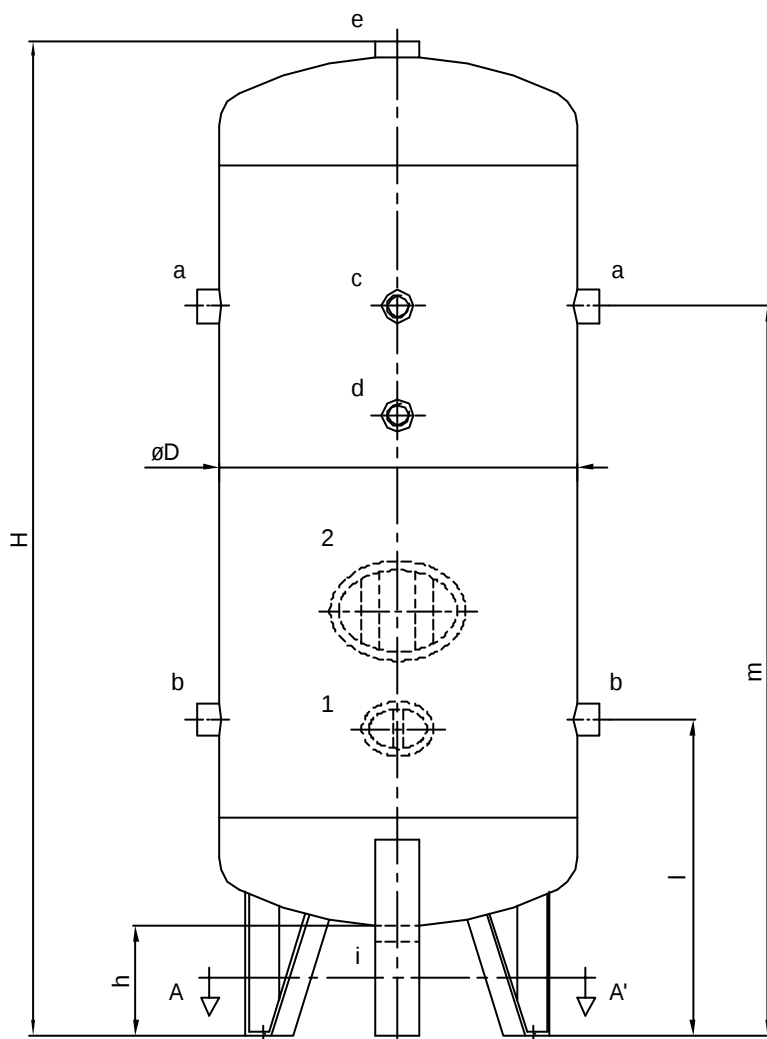

Corte A-A'

- 1: Boca de inspección opcional 100 x 150 en todo los modelos
2: Boca de inspección opcional 300 x 400 en modelos 2000 a 10000

TIPO	P (bar)	V (litros)	D	H	l	m	h	f	g	j	k	a (GH)	b (GH)	c (GH)	d (GH)	e (GH)	i (GH)	PESO (kg)
1000	11.5	965	790	2345	725	1725	200	694	16	80	80	2"	2"	¾"	⅜"	1¼"	1¼"	187
1500	11.5	1449	1000	2305	590	1860	180	877	16	80	100	3"	3"	¾"	⅜"	1¼"	1¼"	309
2000	11.5	1931	1000	2805	595	2355	180	920	16	80	100	3"	3"	¾"	⅜"	1¼"	1¼"	397
3000	11.5	2894	1200	2965	700	2410	185	1106	16	100	100	3"	3"	¾"	⅜"	1¼"	1¼"	542
4000	11.5	4136	1450	3070	780	2430	180	1355	24	100	130	3"	3"	¾"	⅜"	1¼"	1¼"	729
5000	11.5	4946	1450	3570	780	2930	180	1355	24	100	130	3"	3"	¾"	⅜"	1¼"	1¼"	855
6000	11.5	5792	1450	4070	780	3430	180	1355	24	100	130	3"	3"	¾"	⅜"	1¼"	1¼"	982
8000	11.5	7718	1650	4135	820	3415	145	1524	23	135	180	4"	4"	¾"	⅜"	1¼"	1¼"	1326
10000	11.5	9686	1650	5135	820	4415	145	1524	23	135	180	4"	4"	¾"	⅜"	1¼"	1¼"	1657

Cotas en mm. Conexiones roscadas gas hembra.